

Trenching (C- Groove Series)




Features:


- Standard body design 2.5 in/64.0 mm gauge
- Wide-flare shoulder provides maximum block and face protection
- Step-shank design for improved strength

Tool Part Number	Shank (in, mm)	Shoulder (in, mm)	Tip Diameter (in, mm)	Gauge (in, mm)	Pieces per Box	Pieces per Pallet
TX23	1.5 in 30.0 mm	2.5 in 64.0 mm	0.945 in 24.0 mm	2.5 in 64.0 mm	10	600
TX39	1.5 in 30.0 mm	2.5 in 64.0 mm	0.775 in 19.68 mm	2.5 in 64.0 mm	10	600
TX74	1.5 in 30.0 mm	2.5 in 64.0 mm	0.708 in 17.98 mm	2.5 in 64.0 mm	10	600
TX75	1.5 in 30.0 mm	2.5 in 64.0 mm	0.817 in 20.75 mm	2.5 in 64.0 mm	10	600
TX76	1.5 in 30.0 mm	2.5 in 64.0 mm	0.93 in 23.62 mm	2.5 in 64.0 mm	10	600


Block Part Number	Bore Hole Diameter (in, mm)	Width (in, mm)	Angle (degrees)	Internal Groove	Pieces per Box	Pieces per Pallet
B38HD50S	1.50 in 38.23 mm	3.25 in 82.5 mm	50°	Yes	8	480
B38HD50L	1.50 in 38.23 mm	3.25 in 82.5 mm	50°	Yes	8	480

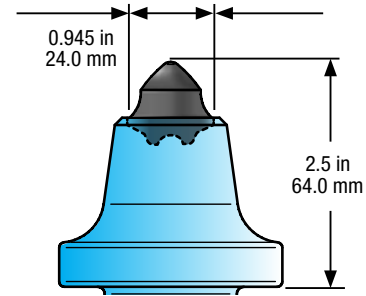


TX23
Carbide Valve Seat




TX39
Carbide Plug

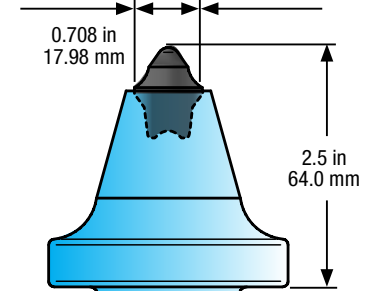


TX74
Carbide Hybrid
(Plug/Valve Seat)



TX75
Carbide Hybrid
(Plug/Valve Seat)

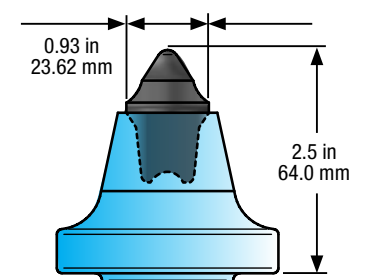

TX76
Carbide Hybrid
(Plug/Valve Seat)

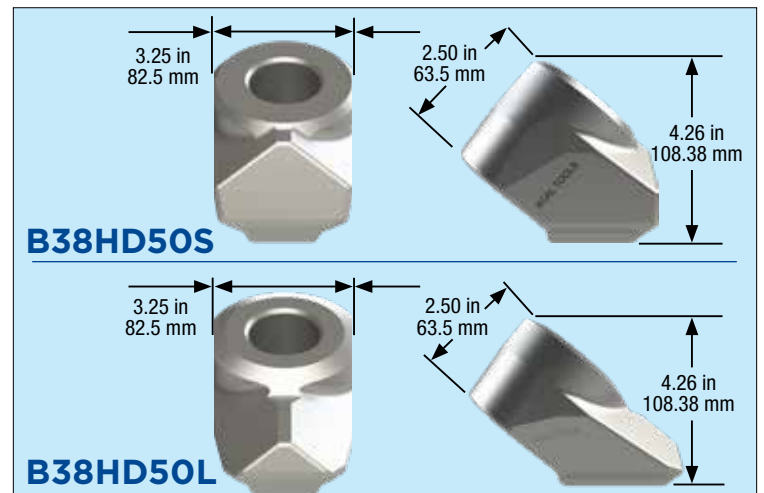

B38HD50S

B38HD50L



Proudly made in the U.S.A.